

fi

3		IEC60950 EN60950 UL60950
		I/P-O/P 3kVAC I/P-FG(CASE) 1.5kVAC O/P-FG 0.5kVAC
		I/P-O/P I/P-FG O/P-FG 100Mohms/500VDC 25 70% RH
		EN55011 EN55032 (Cl SPR32) CLASS B
		IEC/EN 61000-4-2 Level 4 Contact $\pm 8kV$ /Air $\pm 15kV$
		IEC/EN 61000-4-3 Level 4 Lev3
		IEC/EN 61000-4-4 Level 4 4kV
		IEC/EN 61000-4-5 Level 4 2kV
MTBF		165K hrs min. MIL-HDBK-217F(25)
		116*57*38mm (L*W*H)
		242g/ 15.7kg/
		58 /
		360*300*250mm
	1.	TA=25 75% 230VAC
	2.	0.1uF 47uF 20Mhz
	3.	



侧


-BLE



mm [inch] ± 0.5mm



AC OK

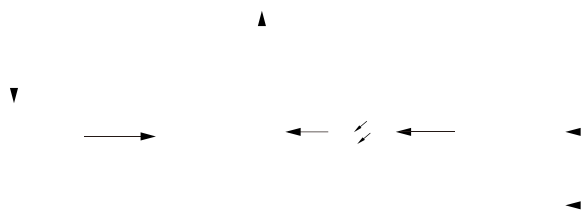

sal es@oeygo. net



+86(20) 3214 4470



51 E