



90- 264VAC 100- 370VDC

99*82*30mm

CLASS

/ / /

/

-40 to +70

3kV

AC OK BAT LOW

100%


3

CM65

UPS

		V1 ± 1.0%
	V2	
	(V1)	± 1.0%
	(V1)	± 1.0%
	()	1s/230VAC
	()	16ms/230VAC
		90-264VAC 100-370VDC
		100-240VAC 50/60Hz
	()	1.2A MAX/100VAC 0.6A MAX/240VAC
	()	40A/115VAC 60A/230VAC
	()	0.75nA/230VAC/60Hz
	CM65-A	12V 2A 10V± 0.2V 12± 0.2V
		24V 2A 22V± 0.2V 26± 0.2V
	CM65-C	48V 1A 44V± 0.2V 50± 0.2V
	V1	110% Load
	V1	
	V1	

3		IEC60950 EN60950 UL60950
		I/P-O/P 3kVAC I/P-FG(CASE) 1.5kVAC O/P-FG(CASE) 3kVAC
		I/P-O/P I/P-FG O/P-FG 100M Ohms/500VDC 25 70% RH
		EN55011 EN55032 (Cl SPR32) CLASS B
		IEC/EN 61000-4-2 Level 4 Contact ± 8kV/Air ± 15kV
		IEC/EN 61000-4-3 Level 4 Lev3
		IEC/EN 61000-4-4 Level 4 4kV
		IEC/EN 61000-4-5 Level 4 2kV
MBF		165K hrs min. MIL-HDBK-217F(25)
		99*82*30mm (L*W*H)
		198g/
		360*300*250mm
	1.	TA=25 75%
	2.	0.1uF 47uF 20kHz
	3.	




mm [inch]

± 0.5mm



AC OK

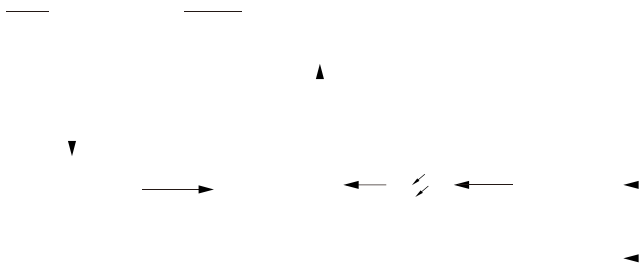

 sales@oeygo.net

 +86(20) 3214 4470



51 E