



90-264VAC

127\*76.2\*35mm 5" \* 3"

0.3W

/ / /

250W 23CFM 350W


### 350W SFC350-SXXVR

SFC350-S36VR		350	36	34.2-37.8	9.72	150	93
SFC350-S48VR		350	48	45.6-50.4	7.29	150	94

		± 1.0%
		± 1.0%
		± 1.0%
	( )	1000ns 50ns/230VAC 2000ns 60ns/115VAC
	( )	10ns/230VAC 10ns/115VAC
		90-264VAC
		100-240VAC
	( )	PF 0.95/230VAC PF 0.98/115VAC
	( )	3.8A/115VAC 1.85A/230VAC
	( )	30A/115VAC 60A/230VAC
	( )	0.75mA/230VAC/60Hz
		110% 160% load

## 350W SFC350-SXXVR

	MTBF	165K hrs min.	MIL-HDBK-217F(25 )			
		127*76.2*35mm (L*W*H)				
		342g				
		24 /				
		360*300*200mm				
	1.	TA=25	75%	230VAC		
	2.			0.1uF	47uF	20Mhz
	3.					

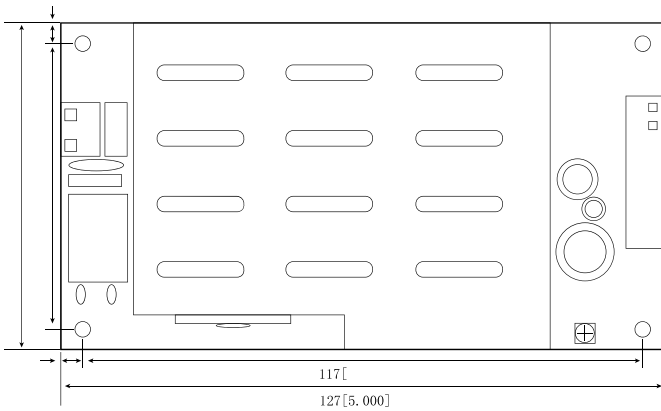

1.           mm[ inch]           ± 0.5mm
2. CLASS
3. CLASS



sal es@oeygo. net



+86(20) 3214 4470



51 E