




		± 2.0%					
		± 1.0%					
		± 1.5%					
	( )	1500ms 50ms/230VAC 1500ms 50ms/115VAC					
	( )	12ms/230VAC 12ms/115VAC					
		90-132VAC/180-264VAC					
		47-63Hz 440Hzmax					
	( )	3.2A/115VAC 2.0A/230VAC					
	( )	60A/230VAC					
	( )	1mA/230VAC/50Hz					
		110-145%					
		12-36V			48V		
		12-36V			48V		
			12VDC	15VDC	24VDC	36VDC	48VDC
			13.5-16V	16.8-19.5V	27-32V	40-48V	55-60V
		-25 to +70 ( ° C )					
		10-85%RH					
		-40 to +105					
		0.03%(0 -50 )					
		10-500Hz 2G 10 / X Y Z 60					
3		IEC62368 EN62368 UL62368					
		I/P-O/P 3kVAC I/P-FG(CASE) 1.5kVAC O/P-FG(CASE) 0.5kVAC					
		I/P-O/P I/P-FG O/P-FG >100M Ohms/500VDC 25 70% RH					
		EN55011 EN55032 (Cl SPR32) CLASS A					
		IEC/EN 61000-4-2 Level 4 Contact ± 8kV/Air ± 15kV					
		IEC/EN 61000-4-3 Level 4					
		IEC/EN 61000-4-4 Level 4 4kV					
		IEC/EN 61000-4-5 Level 4 2kV					
MTBF		165K hrs min. MIL-HDBK-217F(25 )					
		215*115*30mm (L*W*H)					
	1.	TA=25	75%	230VAC			
	2.			0.1uF	47uF	20kHz	
	3.						



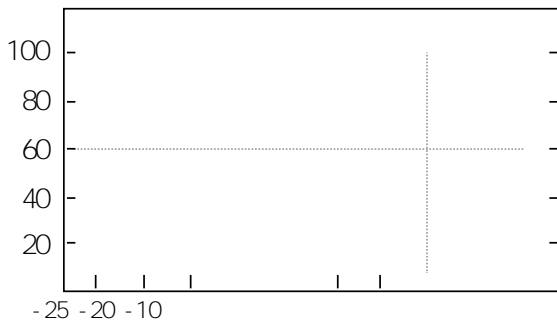

sal es@oeygo. net



+86(20) 3214 4470



51 E